




MAP-Q-T8

Curve-Shape Prismatic
Diffused Fitting



โคมสี่เหลี่ยมเข้ามุมฝาครอบพลาสติก
แบบมีแผ่นสะท้อนแสง

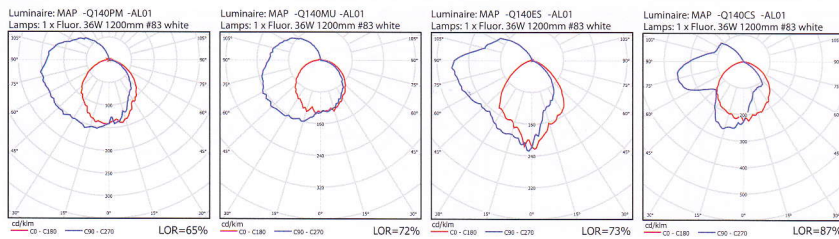

TIS.902-2532




TIS.1955-2551

SPECIFICATION



- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Diffuser :** Is made of acrylic with 2.0-3.0 mm. thickness
Option diffuser : (**) Opal = MU , Clear = CS
- Lamp holder :** Rotary lock (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm.70 °c-105 °c certified by TIS NO.11-2531.
- Option :**
- Reflector :** 99.90 % purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.

DRAWING

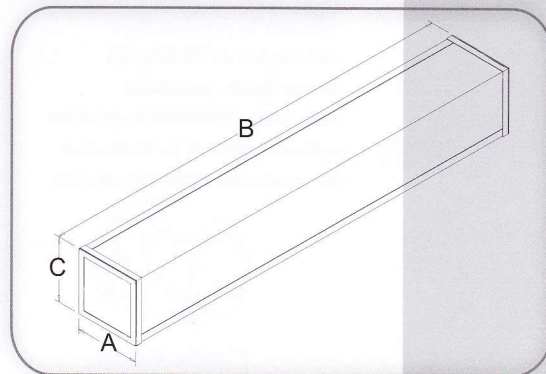

DIMENSION

Model No.	No. of Lamps	A (mm.)	B (mm.)	C (mm.)
MAP-Q120**	1 x 14w T5	115	580	115
MAP-Q120**	1 x 28,54w T5	115	1180	115
MAP-Q120**-AL	1 x 14w T5	115	580	115
MAP-Q140**-AL	1 x 28,54w T5	115	1180	115

Note: subject to +/- 2 mm in tolerance