





MWP-T5

Gypsum Ceiling Prismatic
Diffused Fitting
with Aluminium Reflector


โคมฝังฝ้าฉาบเรียบพลาสติก
แบบมีแผ่นสะท้อนแสง

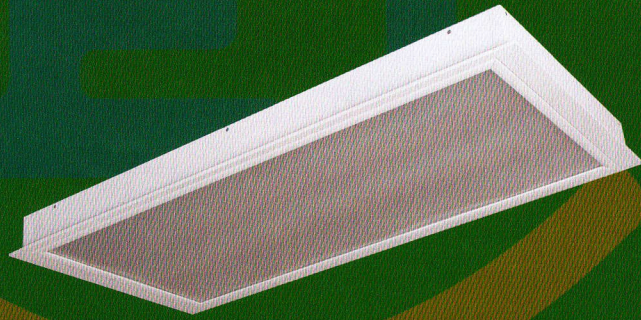


Luminaire: MWP4T5_6_28CS -AL01
Lamps: 4 x Fluor. 28W 4' Silhouette T5




Luminaire: MWP3T5_6_28CS -AL01
Lamps: 3 x Fluor. 28W 4' Silhouette T5



Luminaire: MWP2_T5_6_28CS_AL01_MB
Lamps: 2 x Fluor. 28W 4' Silhouette T5



Luminaire: MWP2_T5_6_28CS_AL01
Lamps: 2 x Fluor. 28W 4' Silhouette T5



TIS.903-2532




TIS.1955-2551

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Reflector :** 99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
- Diffuser :** Is made of prismatic acrylic with 2.0-3.0 mm. thickness
Option diffuser : (**) Prismatic = PM , Opal = MU , Stipple = ES , Clear = CS
- Frame for diffuser :** Extrude aluminium with high-grade epoxy polyester power coating.
- Lock type :** Spring latch locker system (inner)
- Lamp holder :** Rotary lock (G5) lamp holder certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

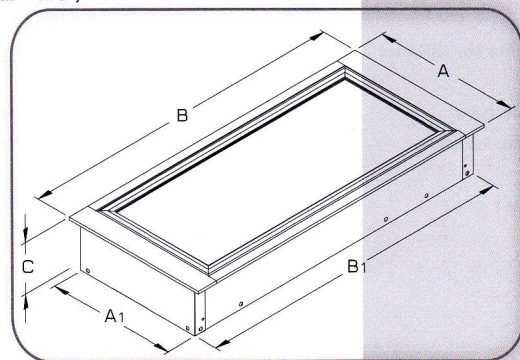

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	B1 (mm.)	C (mm.)	Ceiling cutout (mm.)
MWP2T5/6/14**-AL	2 x 14w T5	620	580	665	613	100	585 x 630
MWP3T5/6/14**-AL	3 x 14w T5	620	580	665	613	100	585 x 630
MWP4T5/6/14**-AL	4 x 14w T5	620	580	665	613	100	585 x 630
MWP2T5/6/28,54**-AL	2 x 28w ,54w T5	620	580	1265	1223	100	585 x 1230
MWP3T5/6/28,54**-AL	3 x 28w ,54w T5	620	580	1265	1223	100	585 x 1230
MWP4T5/6/28,54**-AL	4 x 28w ,54w T5	620	580	1265	1223	100	585 x 1230

Note: subject to +/- 2 mm in tolerance