


## MIRROR ALUMINIUM LOUVER

**MODEL : MCM143/LED**



### SPECIFICATION

- Housing :** Steel sheet thickness of 0.6 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester powder coating.
- Reflector :** 99.99% purity anodized aluminium reflector to provide total reflectance of TR 87% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
- Louver :** 99.99% anodized aluminium reflector to provide total reflectance of upto TR 87% Christmas tree profile cossbars reduce glare significantly.
- Lamp holder :** Rotary lock (G13) lamp holder certified by TIS NO.344-2549.
- Wire :** UL #18 AWG 105 ° c

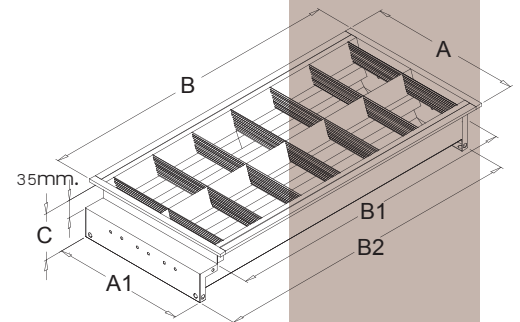

TIS.902-2(2)-2557



TIS.1955-2551



ISO. 9001



ISO. 14001

### DESCRIPTION

MODEL	POWER	DIMENSION (mm.)						Note : Subject +/- 2 mm. Ceiling : Cut Out (mm.)
		A	B	C	A1	B1	B2	
MCM 143/LED	1 x 18w. LED	300	1200	95	280	1175	1223	285 x 1185