

## Surface Ceiling Prismatic Diffused Fitting with Aluminium Reflector

**MODEL : MSP446CS-AL/LED**



TIS.902 PART2(1)-2557




TIS.1955-2551



**FEATURES** โคมฝาครอบพลาสติกและเฟรมอลูมิเนียมอัดขึ้นรูป(Extrusion)มีแผ่นรอง AL สะท้อนแสงชนิดติดลอยสำหรับจุดประสงค์ทั่วไป เหมาะสำหรับหลอด (LED T8) เหมาะสำหรับ ติดตั้งภายในอาคาร สำนักงาน โรงพยาบาล โรงเรียน และอื่นๆ

### SPECIFICATION

- Housing :** Steel sheet thickness of 0.6 mm.,And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Reflector :** 99.99% purity anodized aluminium reflector to provide total reflectance of TR 87% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
- Diffuser :** Is made of prismatic acrylic with 2.5 mm. thickness  
 Option diffuser : ( ) Opal = MU, (X) Clear = CS,  
 ( ) Prismatic = PM , ( ) Stipple = ES
- Lock type :** Spring latch locker system (inner)
- Lamp holder :** Rotary lock (G13) lamp holder certified by TIS.344-2562
- Wire :** Thw size 1.0 sqmm. 70°C,UL#18 Awg 105°C certified by TIS.11-2553

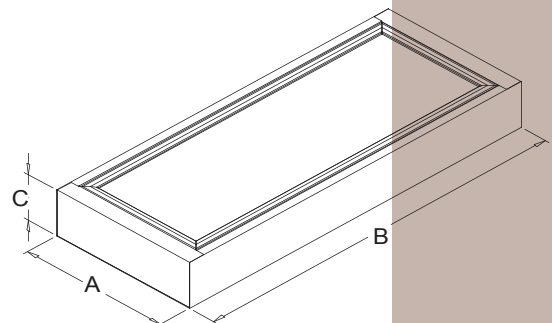

| Description     |              |                 |      |    |  |                                                     |
|-----------------|--------------|-----------------|------|----|--|-----------------------------------------------------|
| Model           | Power        | Dimension (mm.) |      |    |  | Note : Subject +/- 2 mm.<br>Ceiling : Cut out (mm.) |
|                 |              | A               | B    | C  |  |                                                     |
| MSP446CS-AL/LED | 4 x LED (T8) | 605             | 1225 | 80 |  |                                                     |
|                 |              |                 |      |    |  |                                                     |