

Technical data:

Explosion Protection	: Ex d IIB T6
Conforming to	: Standards IEC 60079-1 or UL 60079-1
Marking for test	: Ex II2G
Degree of Protection	: IP54/66 acc. To IEC 60529
Ambient Temp. (Ta)	: - 5°C to + 55°C
Rated Voltage	: 220 - 240 V. AC. 50/60Hz.
LED Watt. (NEW PRODUCT)	: 10w., 15w.
Battery	: 6V. 4Ah (Flu. and Compact Flu.) : 3.6V. 2.1Ah (LED)
Recharge time	: 10-12-hours from fully discharge (LED)
Emergency duration	: 2-hours (Standard) or 3-4 hours (Made-to-order)
Entries thread	: 3/4" NPT
Protection class for UL.	: Class I, Division 1or 2 Group. C,D Class II, Division 1 or 2 Groups. E,F,G Class III
Protection class for IEC	: Zone1 , 21 and Zone 2 , 22



TYPE A



TYPE B




TYPE D

Specification:

Body material	: Marine grade copper-free aluminum alloy with epoxy-polyester powder coated , RAL7032 (GREY)
Lens	: Heat and impact resistant clear glass
Sing face	: White, Green acrylic with red, white color letters.

Catalogue Numbers and Dimension:

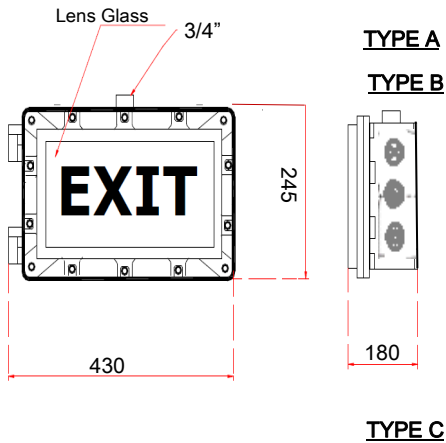

Lamp Watts	Temp. Class (Surface Temp.)		Cat., No.
	40 °C Ta	55 °C Ta	
LED LAMP			
10w.	T6	T6	EXIT2010L-A
10w.	T6	T6	EXIT2010L-B
15w.	T6	T6	EXIT2015L-D

