

Application data :

The Sealing Fiber

Forms a positive dam to hold sealing compound in the sealing fitting.

The Sealing Compound

For seal forming between and around each electrical conductor inside of sealing fitting to restrict the passage of gases, vapors and flames.



Sealing Fiber

Technical data :

The Sealing Fiber is a rope the asbestos fiber that easy to form a dam and non-flammable.

The Sealing Compound is water soluble powder, that can be easily mixed and poured.


Mix 2 parts by volume of Sealing Compound with 1 part of clean water in a completely clean container. Stir immediately and thoroughly then pour into the sealing fitting.

Compound harden in 60 minutes then form a secure non-shrinking, acids, water and oil resistant seal.




Packing:


Sealing Compound and Sealing Fiber are packed together in standard package
454 Grams (1 lb.)

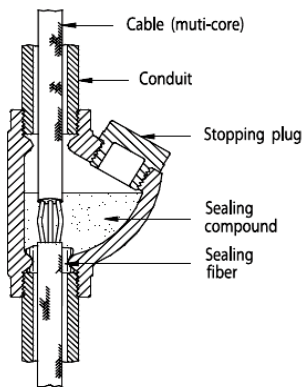

EYS Vertical seal

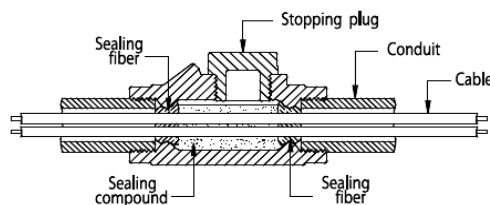

EYK Horizontal seal

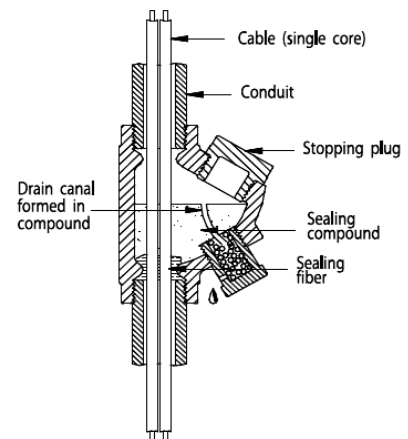

EYD Vertical seal and water drain

Depth of sealing compound should be equal to the trade size of conduit, having a minimum of 5/8 inch thickness.

Close a plug immediately after pouring.